


...-R-...

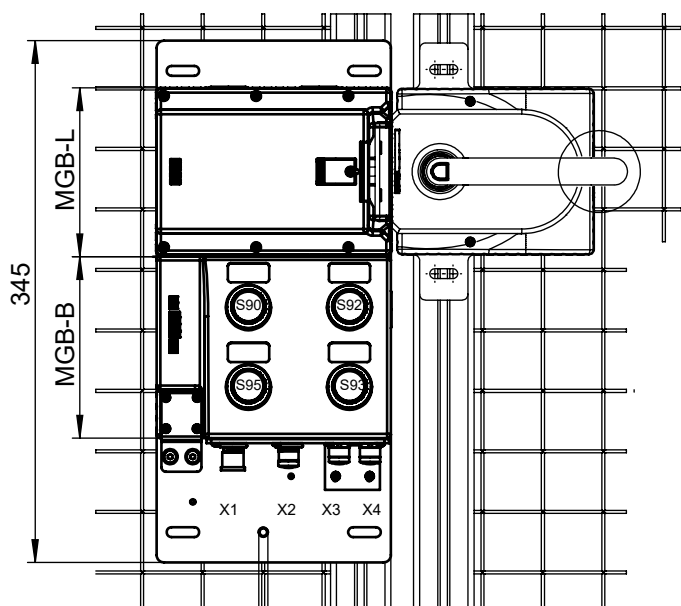

inklusive M6
Funktionserde
function earth
included

Blenden-Set für Taster inklusive:
Lens-Set for push-buttons included:

2x weiss / white
1x blau / blue
1x gelb / yellow
1x grün / green
1x rot / red

Inklusive:

4 Stück Einlegeschilder
silberfarben, selbstklebend.
Ohne Aufschrift (12,5x27mm)

Included:

4 pcs. insertion plates, silver,
self-adhesive.
Without inscription (12,5x27mm)

Betriebsanleitung beachten


(bei Abweichungen zwischen
Datenblatt u. Betriebsanleitung
gelten die Daten des Datenblattes)

**Please observe the
operating instructions**



(in case of disagreement between
data sheet and operating instructions,
the information of the data sheet
are to be considered)

- X1** M12 A-coded (Stecker/ male) 4-polig
X2 M12 A-coded (Buchse/ female) 4-polig
X3 / X4 M12 D-coded (Buchse/ female) 4-polig
X14 M12 A-coded (Buchse/ female) 5-polig
EN (Zustimmtaster / Enabling Switch)

...-L-...

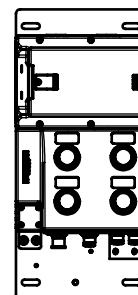**Detail A**

Sperrverriegelung im
ausgefahrenen Zustand
Automatic lockoutbar in "open" position.

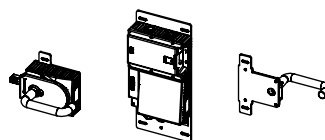

	MGB-H	MGB-L...	MGB-E...	Türanschlag Door hinge	S90	S92	S93	S95
MGB-L1B-EIA-R-136474		X		R	Taster beleuchtet	Taster beleuchtet	Taster beleuchtet	Taster beleuchtet
MGB-L1HB-EIA-R-171966	X	X		L	Push-button illuminated	Push-button illuminated	Push-button illuminated	Push-button illuminated
MGB-L1B-EIA-L-136486		X						
MGB-L1HB-EIA-L-171967	X	X						

EtherNet / IP

Datenbytes / Data bytes
Datenblöcke / Data blocks

Standardfunktionen Standard functions	Connection header
Sichere Funktionen Safe functions (FI)	Failsafe input 0
Standardfunktionen Standard functions	Input 0
Standardfunktionen Standard functions	Input 1
Standardfunktionen Standard functions	Input 2
Standardfunktionen Standard functions	Diagnostics
Standardfunktionen Standard functions	Fault code
Standardfunktionen Standard functions	Fault code

Eingangsbereich / Input range:

Bit 7 6 5 4 3 2 1 0

Connection header	Byte 0	-	-	-	-	-	DA	CF	RM
Connection header	Byte 1	DiagnosticSequenceCount							
Connection header	Byte 2	-	-	-	-	-	-	-	-
Connection header	Byte 3	-	-	-	-	-	-	-	-
Failsafe input 0	Byte 4	-	-	-	-	-	-	-	-
Failsafe input 1	Byte 5	FI.UK	FI.SK	-	-	-	FI.L	FI.B	FI.D
Input 0	Byte 6	-	-	-	S92.1	-	-	-	S90.1
Input 1	Byte 7	-	-	-	S95.1	-	-	-	S93.1
Input 2	Byte 8	-	-	-	-	-	-	-	-
Diagnostics	Byte 9	D.LT	-	D.OL	-	-	-	D.PF	-
Fault code	Byte 10	FaultCode							
Fault code	Byte 11	FaultCode							

Ausgangsbereich / Output range:

Bit 7 6 5 4 3 2 1 0

Failsafe output 0	Byte 0	-	-	-	-	-	-	-	FO.L
Output 0	Byte 1	-	-	H95	-	H93	H92	-	H90
Output 1	Byte 2	-	-	-	-	-	-	-	-
Control and ACK	Byte 3	Q.PF	Q.G	-	-	-	-	-	-

DA = Diagnostic active
CF = Connection faulted
RM = Run mode
FI.UK = D and B and L

FI.SK = D and B
FI.L = Guard locking
FI.B = Bolt position
FI.D = Door position

D.LT = Lifetime
D.OL = Guard locking
D.PF = Plausibility fault

FO.L = Guard locking
Q.PF = Acknowledge plausibility fault
Q.G = Acknowledge all