


...-R-...

...-L-...

Maße in mm / Dimensions in mm

© EUCHNER GmbH + Co. KG


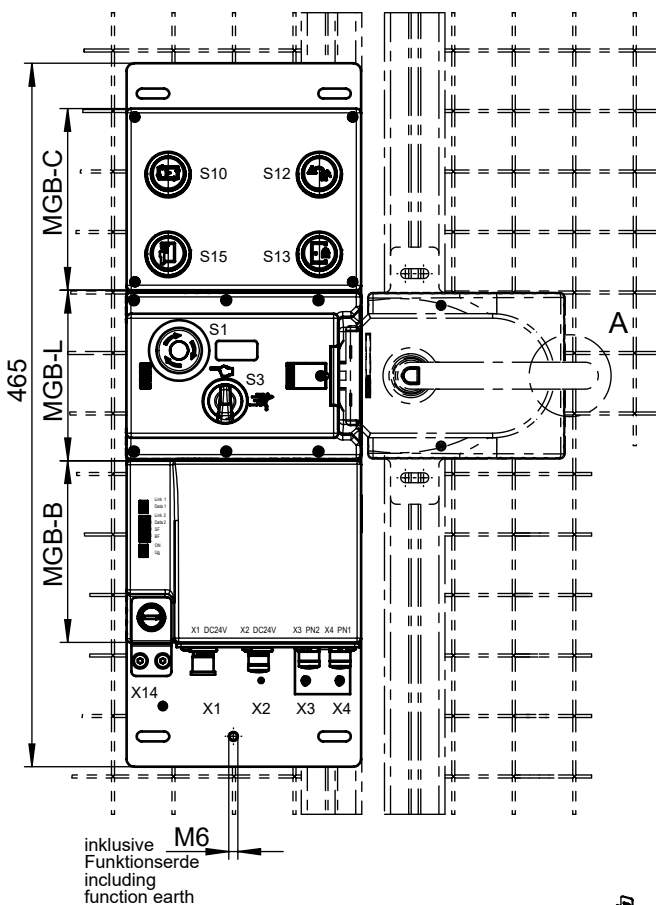


X1 M12 A-coded (Stecker/ male) 4-polig
X2 M12 A-coded (Buchse/ female) 4-polig

X3 / X4 M12 D-coded (Buchse/ female) 4-polig


X14 M12 A-coded (Buchse/ female) 5-polig
EN (Zustimmtaster / Enabling Switch)

z.B. 110560 ZSA2B4G10CC2322
 Anschlussbelegung / PIN assignment

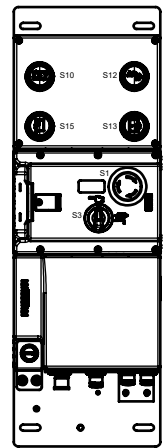

Detail A

Sperrverriegelung im
 ausgefahrenen Zustand
 Automatic lockoutbar in "open" position.




Inklusive:
 1x Blindstecker

Included:
 1x blanking plug

Inklusive:
 1 Stück Einlegeschilder
 silberfarben, selbstklebend.
 (12,5x27mm)

Including:
 1 pcs. insertion plates, silver,
 self-adhesive. (12,5x27mm)

1x E-Stop



	MGB-H	MGB-L...	MGB-E...	Türanschlag Door hinge	S1 (ES)	S3 Wahlschalter beleuchtet Selector switch illuminated	S10 Taster unbeleuchtet Push-button unilluminated	S12 Taster beleuchtet Push-button illuminated	S13 Taster beleuchtet Push-button illuminated	S15 Taster beleuchtet Push-button illuminated
MGB-L2CB-EIA-R-164275		X		R	NOT-HALT Taster beleuchtet	0 1				
MGB-L2HECB-EIA-R-164274	X	X	X	L	Emergency stop illuminated	RASTEND LATCHING 1x90°, Form L	SCHWARZ BLACK	ROT RED	GRÜN GREEN	GELB YELLOW
MGB-L2CB-EIA-L-164278		X								
MGB-L2HECB-EIA-L-164277	X	X	X							

EtherNet / IP

Datenbytes / Data bytes
 Datenblöcke / Data blocks

		Bit	7	6	5	4	3	2	1	0
Standardfunktionen Standard functions	Connection header	Byte 0	-	-	-	-	DA	CF	RM	
	Connection header	Byte 1	DiagnosticSequenceCount							
	Connection header	Byte 2	-	-	-	-	-	-	-	-
	Connection header	Byte 3	-	-	-	-	-	-	-	-
	Failsafe input 0	Byte 4	-	-	-	-	-	-	FI.EN	FI.ES
	Failsafe input 1	Byte 5	FI.UK	FI.SK	-	-	-	FI.L	FI.B	FI.D
	Input 0	Byte 6	-	-	-	S12.1	-	-	-	S10.1
	Input 1	Byte 7	-	-	-	S15.1	-	-	-	S13.1
	Input 2	Byte 8	-	-	-	S3.1	-	-	-	-
	Diagnostics	Byte 9	D.LT	-	D.OL	-	-	D.ES	D.PF	-
	Fault code	Byte 10	FaultCode							
	Fault code	Byte 11	FaultCode							

Ausgangsbereich / Output range:

		Bit	7	6	5	4	3	2	1	0
Sichere Funktion Safe function (FO.)	Failsafe output 0	Byte 0	-	-	-	-	-	-	-	FO.L
	Output 0	Byte 1	-	-	H15	-	H13	H12	-	-
	Output 1	Byte 2	-	-	-	-	-	H3	-	H1
	Control and ACK	Byte 3	Q.PF	Q.G	-	-	-	-	-	-

DA = Diagnostic active
 CF = Connection faulted
 RM = Run mode
 FI.UK = D and B and L

FI.SK = D and B
 FI.L = Guard locking
 FI.B = Bolt position
 FI.D = Door position

D.LT = Lifetime
 D.OL = Guard locking
 D.ES = Emergency stop
 D.PF = Plausibility fault

FO.L = Guard locking
 Q.PF = Acknowledge plausibility fault
 Q.G = Acknowledge all

Betriebsanleitung beachten

(bei Abweichungen zwischen
 Datenblatt u. Betriebsanleitung
 gelten die Daten des Datenblattes)

Please observe operating instructions

(in case of disagreement between
 data sheet and operating instructions,
 the information of the data sheet
 are to be considered)