
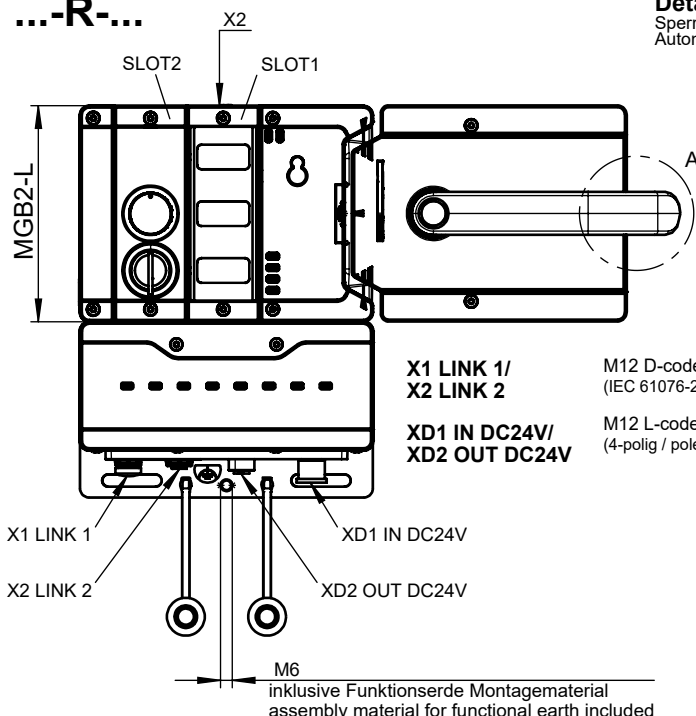



...-R-...

**Detail A**

Sperreinsatz im ausgefahrenen Zustand
Automatic lockoutbar in "open" position.



...-L-...



**X1 LINK 1/
X2 LINK 2**

**XD1 IN DC24V/
XD2 OUT DC24V**

M12 D-coded
(IEC 61076-2-101)

M12 L-coded
(4-polig / poles)

Inklusive:

- Erdungsschraube M6x8
(AC-FE-GS-M6X8-170020)

Including:

- Grounding screw M6x8
(AC-FE-GS-M6X8-170020)

Inklusive:

- 3 Einlegeschilder
(silber, ohne Aufschrift)
- Etikettenhalter
(AY-C-A1-156732)

Including:

- 3 Insertion plates
(silver, without inscription)
- label holder
(AY-C-A1-156732)

Betriebsanleitung beachten

(bei Abweichungen zwischen Datenblatt und Betriebsanleitung gelten die Daten des Datenblattes)

Please observe the operating instructions

(in case of disagreement between data sheet and operating instructions, the information of the data sheet are to be considered)



	MBM...	MGB2-L...	MSM... (SLOT1)	MSM... (SLOT2)	AC-MC... (X1)	AC-MC... (X2)	MGB2-H...	MGB-E...
MGB2-L1HEB-EI-U-S1-MA-R-178024	173315	136776	137610	177236	157024	156718	157021	100465
MGB2-L1HEB-EI-U-S1-MA-L-178025	173315	136776	136710	177236	156718	157024	157022	100465

Übersicht der Kommunikationsdaten:**Overview of the communication data:**

Input EtherNet/IP	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	BM_E_G	-	BM_E_SYS	-	-	BM_E_ML2	BM_E_ML1	BM_D_RUN
2nd Byte	Diagnose Byte							
3rd Byte	LM1_E_G	LM1_E_ER	LM1_E_SM2	LM1_E_SM1	-	LM1_I_UK	LM1_I_SK	LM1_D_RUN
4th Byte	-	-	-	-	-	LM1_I_OL	LM1_I_OT	LM1_I_OD
5th Byte	Diagnose Byte							
6th Byte	LM1_SM2_E_S3	-	-	-	-	LM1_SM2_I_S3	-	-
7th Byte	Diagnose Byte							
Output EtherNet/IP	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	BM_ACK_G	-	-	-	-	-	-	-
2nd Byte	LM1_ACK_G	LM1_ACK_ER	-	-	-	-	-	LM1_O_CL
3rd Byte	-	-	-	LM1_SM2_O_H2_B	-	-	LM1_SM2_O_H2	-
Input CIP Safety	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	-	-	-	-	-	LM1_SM2_FI_S3	LM1_FI_UK	LM1_FI_SK
2nd Byte	-	-	-	-	-	-	-	-
3rd Byte	-	-	-	-	-	-	-	-
4th Byte	-	-	-	-	-	-	-	-
Output CIP Safety	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	-	-	-	-	-	-	-	LM1_FO_CL
2nd Byte	-	-	-	-	-	-	-	-
3rd Byte	-	-	-	-	-	-	-	-
4th Byte	-	-	-	-	-	-	-	-