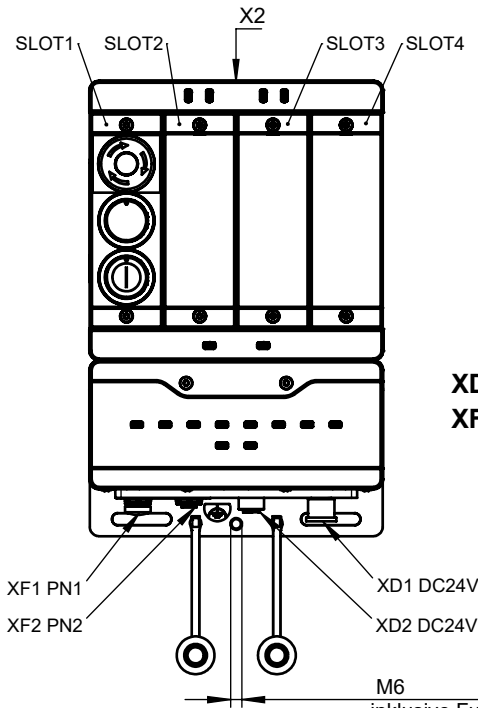


**Inklusive:**

- Erdungsschraube M6x8
(AC-FE-GS-M6X8-170020)

Including:

- Grounding screw M6x8
(AC-FE-GS-M6X8-170020)

XD1 / XD2 M12 L-coded 4-pol

XF1 / XF2 M12 D-coded
(IEC 61076-2-101)

XF1 PN1
XF2 PN2
XD1 DC24V
XD2 DC24V

M6
inklusive Funktionserde Montagematerial
assembly material for functional earth included

Betriebsanleitung beachten

(bei Abweichungen zwischen Datenblatt und Betriebsanleitung gelten die Daten des Datenblattes)
Please observe the operating instructions
(in case of disagreement between data sheet and operating instructions, the information of the data sheet are to be considered)

								
	MBM...	MCM	MSM... (SLOT1)	MSM... (SLOT2)	MSM... (SLOT3)	MSM... (SLOT4)	AC-MC... (X1)	AC-MC... (X2)
MCM-CB-PN-S1-KA-178040	169489	157854	177026	126372	126372	126372	157024	156718

Übersicht der Kommunikationsdaten:**Overview of the communication data:****Input**

Ethernet standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	BM_E_G	-	BM_E_SYS	-	-	BM_E_ML2	BM_E_ML1	BM_D_RUN
2nd Byte	Diagnose Byte (pluggable)							

Ethernet standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	EM1_E_G	EM1_E_SM4	EM1_E_SM3	EM1_E_SM2	EM1_E_SM1	-	-	EM1_D_RUN
2nd Byte	Diagnose Byte (pluggable)							

Ethernet standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	EM1_SM1_E_S3	EM1_SM1_E_S2	EM1_SM1_E_S1	-	-	EM1_SM1_I_S3	EM1_SM1_I_S2	EM1_SM1_I_S1
2nd Byte	Diagnose Byte (pluggable)							

Ethernet SAFE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	-	-	-	-	-	EM1_SM1_FI_S3	EM1_SM1_FI_S2	EM1_SM1_FI_S1

Output

Ethernet standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	BM_ACK_G	-	-	-	-	-	-	-

Ethernet standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	EM1_ACK_G	-	-	-	-	-	-	-
2nd Byte *	EM1_O_H4_B	EM1_O_H3_B	EM1_O_H2_B	EM1_O_H1_B	EM1_O_H4	EM1_O_H3	EM1_O_H2	EM1_O_H1

Ethernet standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	-	-	EM1_SM1_O_H3_B	EM1_SM1_O_H2_B	EM1_SM1_O_H1_B	EM1_SM1_O_H3	EM1_SM1_O_H2	EM1_SM1_O_H1

* Mit Stecker 157029, 161345 oder 172047 in X2 / With connector 157029, 161345 or 172047 at X2.

Maße in mm / Dimensions in mm

© EUCHNER GmbH + Co. KG

Technische Änderungen vorbehalten, alle Angaben ohne Gewähr / Subject to technical modifications; no responsibility is accepted for the accuracy of this information.